



Assembly Instructions

Mobile storage rack

MADE IN CHINA

Model No.: K7108

Dimension:

Tool Required: Rubber Mallet

Safety Rules and Instructions

1. The mobile storage rack must be assembled and used on a level surface.
2. Evenly distribute the weight of load on each shelf, place the heaviest items on the bottom shelf.

Do not overload.

3. DO NOT STAND ON OR USE THE UNIT AS A LADDER.

4. Should there ever be a need to change the level of the shelf, be sure to disassemble and reassemble one level at a time.

5. Use a mallet to drive the rivet to the bottom of slots on the post. Hit the beam close to the connection.

6. Be sure that the rivets seat at the bottom of the slot.

7. To facilitate assembly we recommend having two persons assemble the rack.


MADE IN CHINA

Kincrome Australia Pty Ltd

PARTS OVERVIEW



1. Long Angel Post



2. Middle post




3. Long Double Rivet Beam (DRB)



4. Short Double Rivet Beam (SRB)



5. Long Single rivet beam




6. Big bin




7. Medium bin




8. Small bin




9. Top wire decking



10. Wire Deck for Big Bins



11. Wire Deck for Medium Bins



12. Wire Deck for Small Bins



13. Caster with brake



14. Caster without brake



15. Caster with steel plate


Contents

Item	Description	Q'ty	Item	Description	Q'ty
1	Angel post	4	9	Top wire decking	2
2	Middle post	2	10	Wire decking for big bins	6
3	Long Double rivet beam	16	11	Wire Deck for Medium Bins	6
4	Short Double rivet beam	20	12	Wire Deck for Small Bins	6
5	Long Single rivet beam	24	13	Caster with brake	2
6	Big bin	18	14	Caster without brake	2
7	Medium bin	24	15	Caster with steel plate	2
8	Small bin	30	16	Bolts and nuts	8

Assembly Instructions


Tips

1. The posts are directional; the slot's tapered end must face downward.
2. Tap the beams close to the connection to assure the rivets seat at the bottom of the slot.
3. When assembling the beams the slot of the beam must face up to assure that the decking sits leveled.

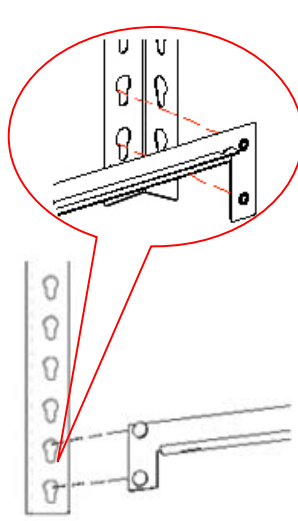


Step 1

Assemble two long posts(1), two middle post (2) and two short Double Rivet Beam(4). Use the last slot from the bottom of the post. Be sure the slot of the beam is facing up. Tap the beams close to the connection and assure the rivets are seated at the bottom of the slot. Laying the big bin wire decking (10) on the bottom level.

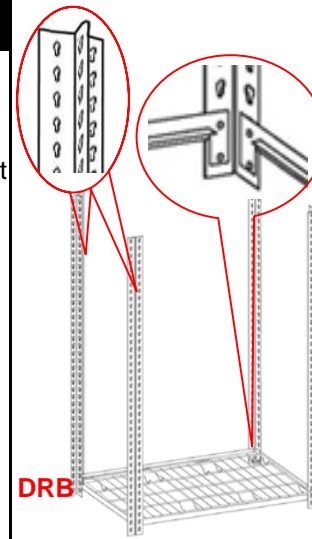

Step 2


Repeat step 1 to continue the assembly until level 7, Each level is 4 slots higher than the last level. Use long double rivet beam(3) on the bottom three level, and long single rivet beam(5) on the other levels. And only level 1, 3, 5, 7 need to add the short beams(4) to enhance the construction.

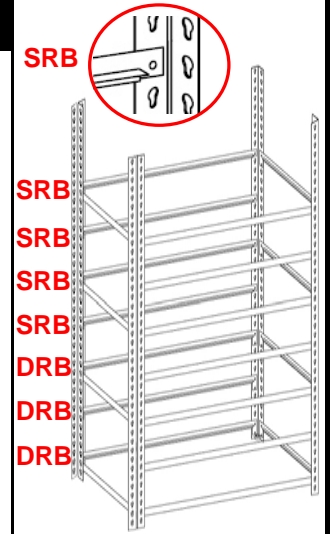

Step 3

It is better to put the wire decking on the desired place before assemble the higher level.

The big bin wire decking(10) suit for the bottom three level, the medium bin wire decking(11) suit for the middle three level.

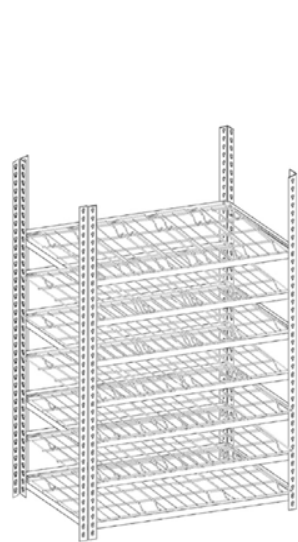


Step 4

Continue the assembly with two long single rivet beam(5), The level 8 is two slots higher than level 7.

From the level 7, put the small bin wire decking(12) on the beams. Repeat this step until the top level. Add the short beam on the top level.

Repeat all above steps to assemble the other side of the bin rack. Or, you could assemble the two sides at the same time.

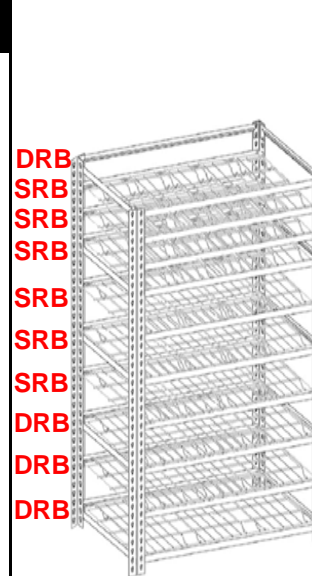

Step 5

Screw the four casters(13) (14) at the bottom of the four angle posts.

And screw the casters (15) under the middle posts by 8pcs bolts and nuts(16).

Add the two top wire decking(9) on the rack. Then put the three kinds of bins on the desired place.

